

DRY UNIT SPECIFICATIONS


STACKING seven high stacking at 45 ft and three high at 40 ft at 34.000 kgs mgw. 33 europallets and 26 iso pallets.

WARRANTY the paint system applied on the container surface is guaranteed against corrosion and/or paint failure for a period of five years.

All containers are guaranteed against any defects or omissions in construction, poor workmanship or defective materials for a period of two years. All decals will be guaranteed for a period of seven years against colour fade, adhesive and peeling.

DELIVERY this type is with domex steel corner posts, understructure and 28 mm thick laminated birch floor (floor load 7260 kgs and tare weight 4260 kgs).

Also possible are domex corner posts, corten understructure and 28 mm thick plywood/bamboo floor (floor load 7260 kgs and tare weight 4660 kgs).

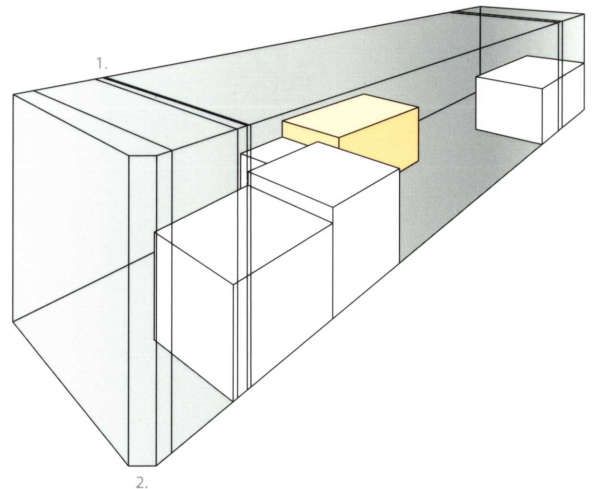

1. compatible with 40 ft. infrastructure
2. design conforms to EU Legislation EN253

DRY FREIGHT CONTAINER

external dimensions

length: 13716 mm
width: 2500 mm
height: 2896 mm

internal dimensions

length: 13556 mm
width: 2444 mm
height: 2695 mm

door opening

door width: 2416 mm
cargo access height: 2551 mm

door height:

2585 mm

capacity

89,2 m ³	europallet (1200mm x 800mm)	33
	iso pallet (1200mm x 1000mm)	26

ratings

max. gross weight: 34000 kgs	tare weight: 4260 kgs
max. payload: 29720 kgs	

- COMPATIBLE WITH 40 FT INFRASTRUCTURE
- CAPACITY TO HANDLE 33 EUROPALLETS
- HIGH-STRENGTH STEEL AND LIGHTWEIGHT FLOOR

Villapark 7-8 3051 BP Rotterdam The Netherlands
phone + 31 10 211 02 22 fax + 31 10 218 32 84
www.unit45.com info@unit45.com

UNIT45
INTERMODAL INNOVATORS